SASVAT®

CERAMICA

ULTIMATE TILING SOLUTION

**PORCELAIN BODY**

**60x60cm**

**60x120cm**

SASVAT

CERAMICA

# 2024/2025

SASVAT CERAMICA

*Traditional & Innovation*

सत्यमेव जयते

The Only Factory In India Which Followed The Lab Test Of Spain & The Most Exporting Company In Spain & Italy

SASVAT
CERAMICA

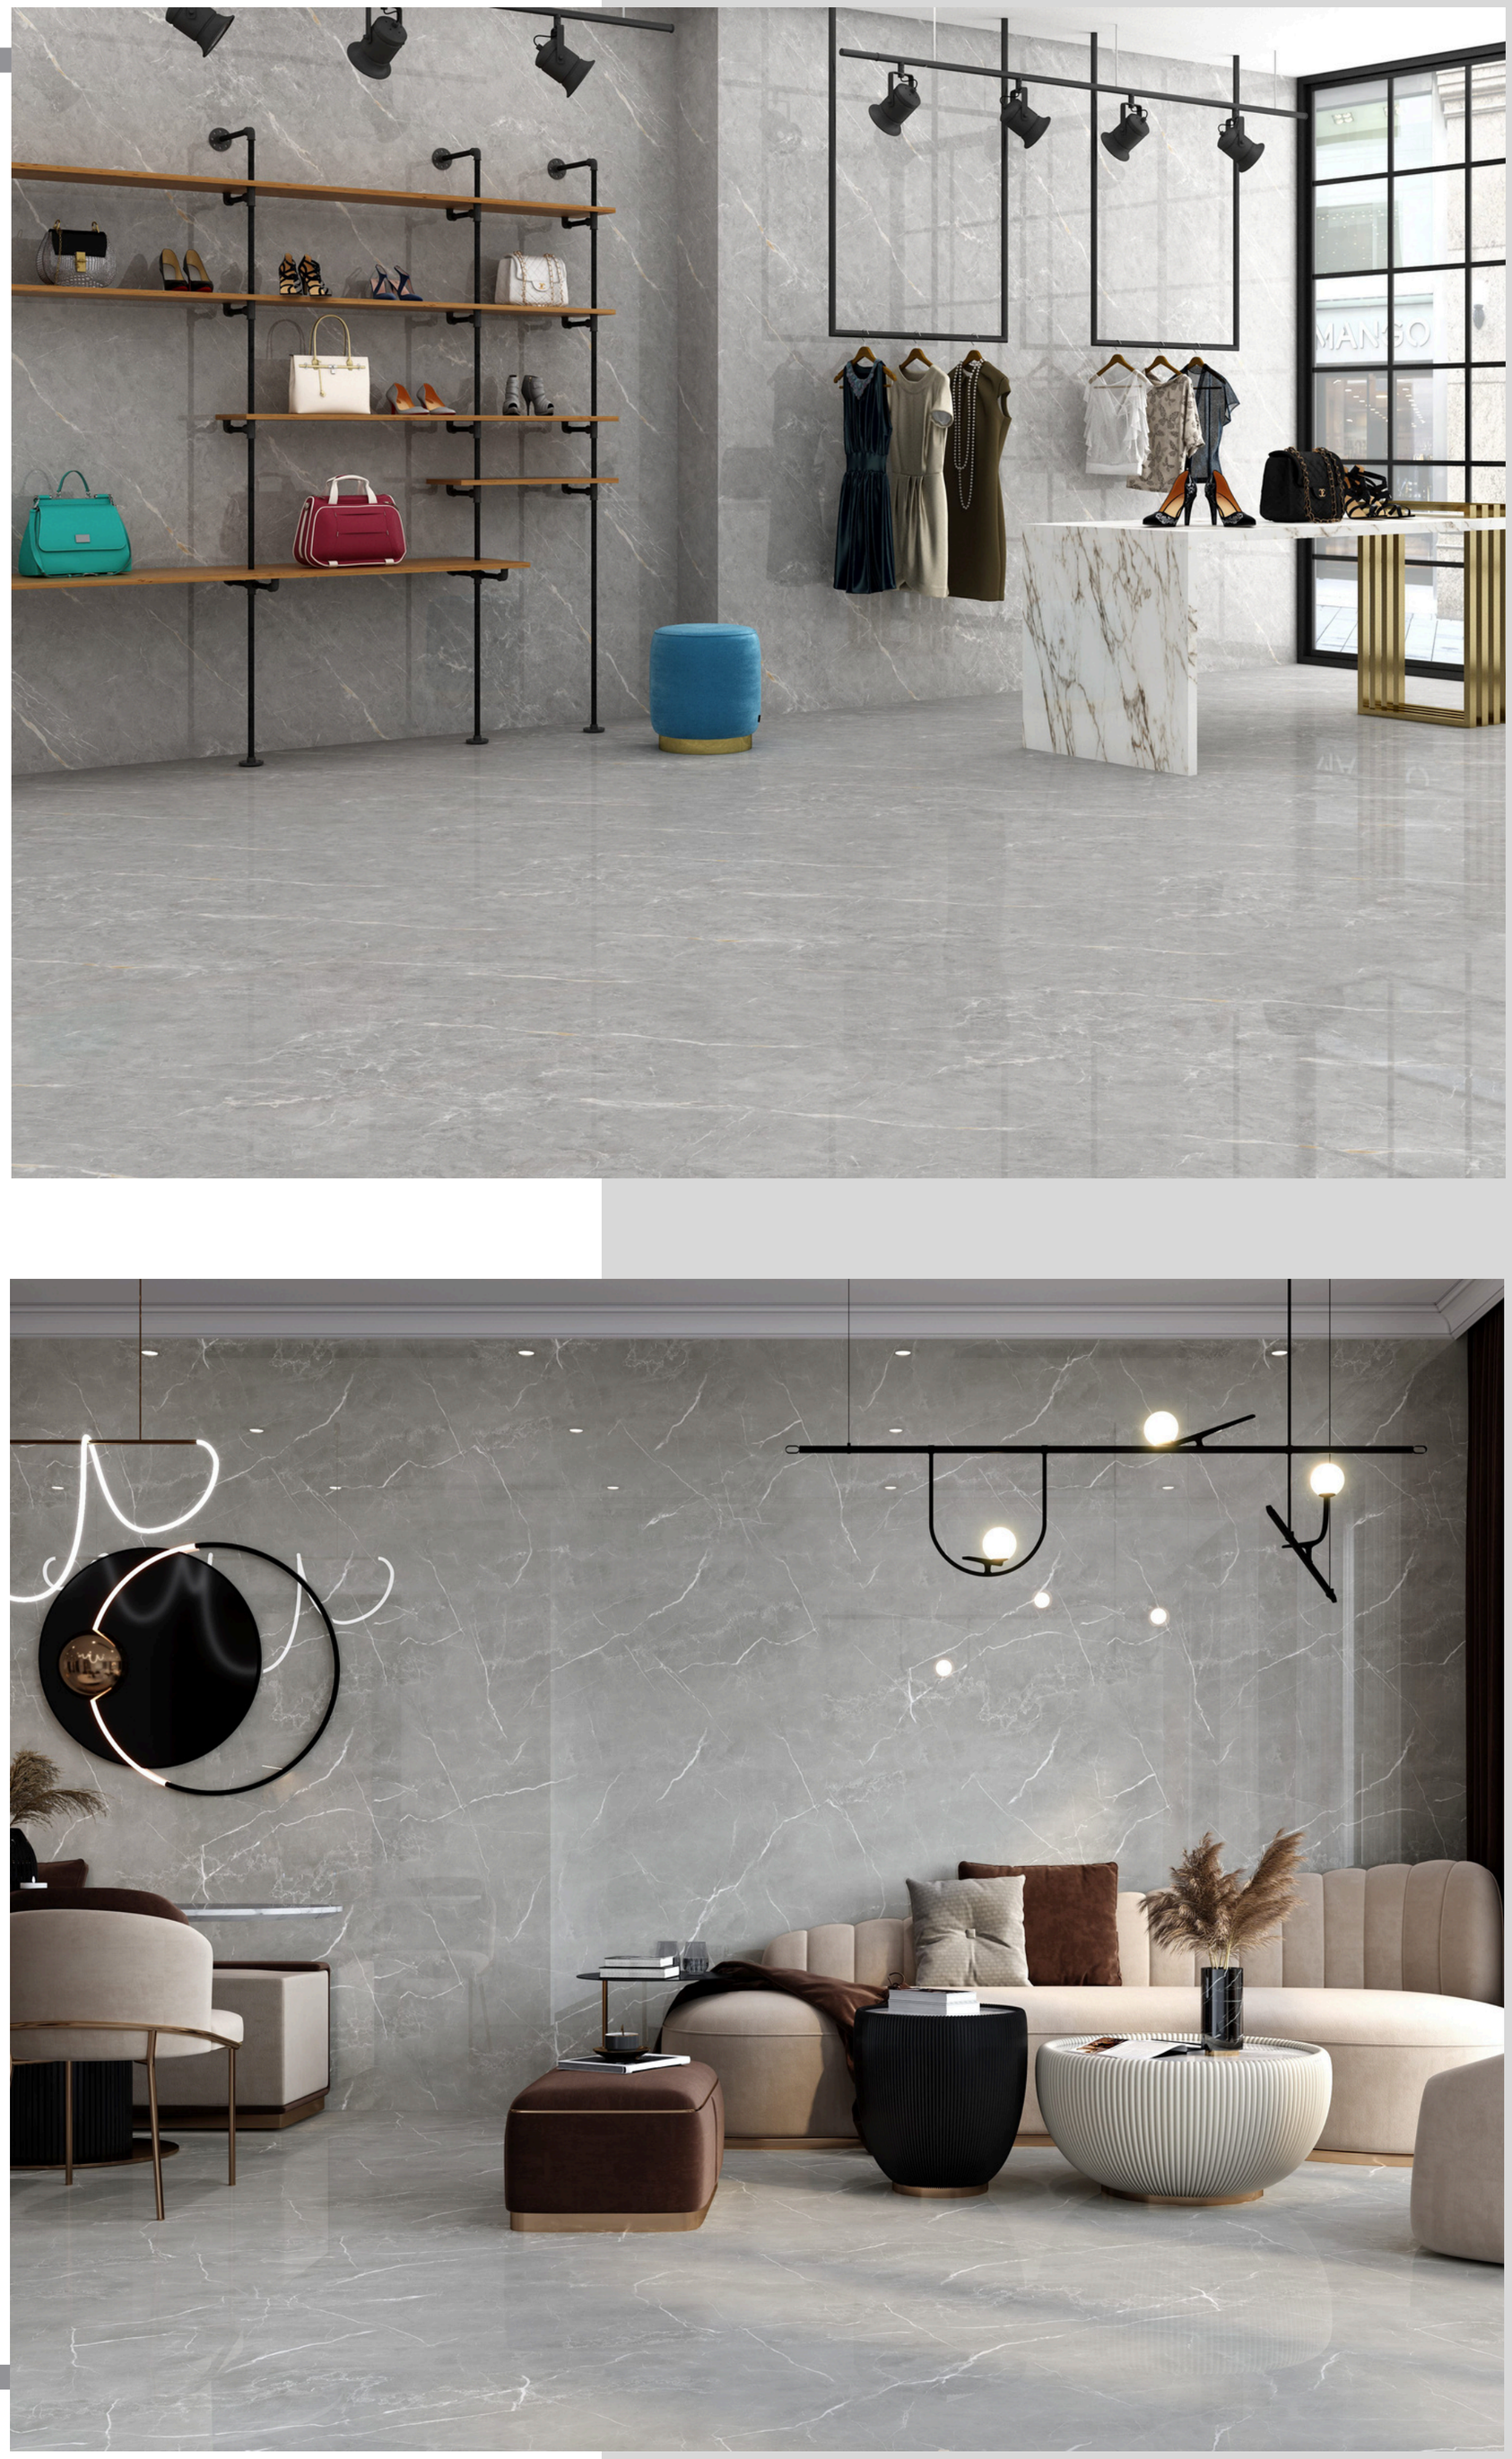

# Porcelánico Pulido

## Polished Porcelain

# FINE FEATURES

SASVAT CERAMICA

01



## VARIOUS SIZE

**You may maintain a delicate balance between the use experience and the building effort involved by choosing from one of our many size.**

02



## FIRE RESISTANCE

**We offer tiles that won't burn. Due to the material's inertness,a fire won't produce any toxins or volatile organic compounds (VOCs)**

03



## TEMPRATURE RESISTANCE

**Our tiles are temprature resistant and can withstand high temperature up to 1600ºc**

04



## CHEMICAL RESISTANCE

**Our ceramic materials have extremely high chemical resistance and stain resistance.The appropriate specified ceramic surface from tree tile can be installed in almost any commercial Setting, including laboratories, hospital & processing plants.**

**FINISH**
GLOSSY

**SIZE**
60x60cm / 60x120cm

ENDLESS COLLECTION

SASVAT CERAMICA

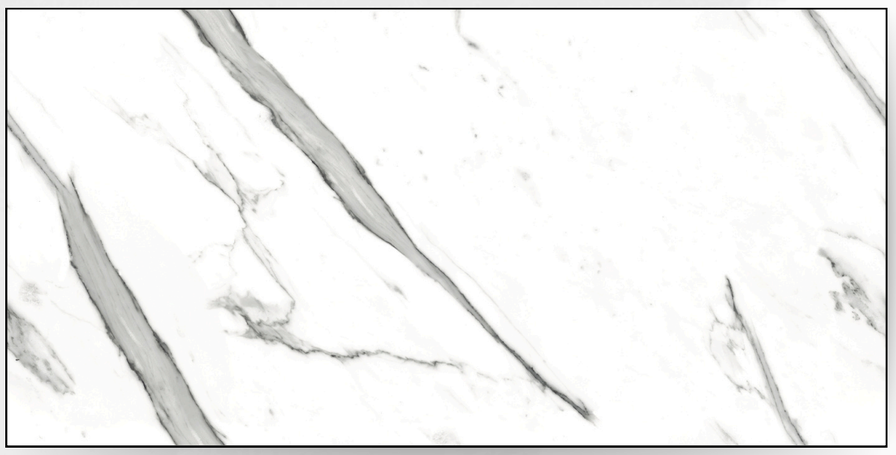

**EL-LUX STATUARIO** R - 3

**EL-FONTAINE ONYX** R - 4

**EL-TOKYO WHITE** R - 3

**EL-ROYAL DYNA** R - 3

**EL-MAKAR STATUARIY** R - 4

**EL-SAN MARINO** R - 4

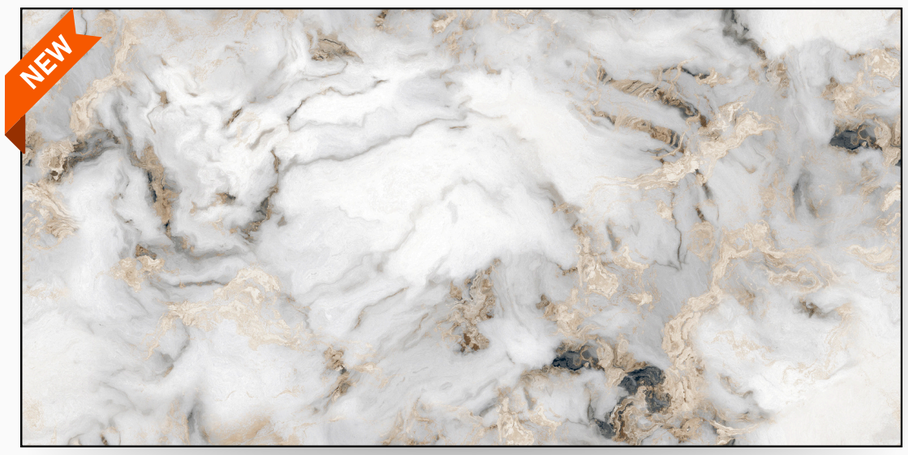


**EL-HARVEST GREY** R - 4

**EL-HARVEST BROWN** R - 4

**EL-PALOMA GREY** R - 4

**EL-PALOMA CREMA** R - 4

Minimum
3mm
Spacer
Recommed



| FINISH | SIZE | |
|---|---|---|
| GLOSSY | 60x60cm / 60x120cm | ENDLESS COLLECTION |

SASVAT CERAMICA

**EL-KAIROS GRIS** R - 4

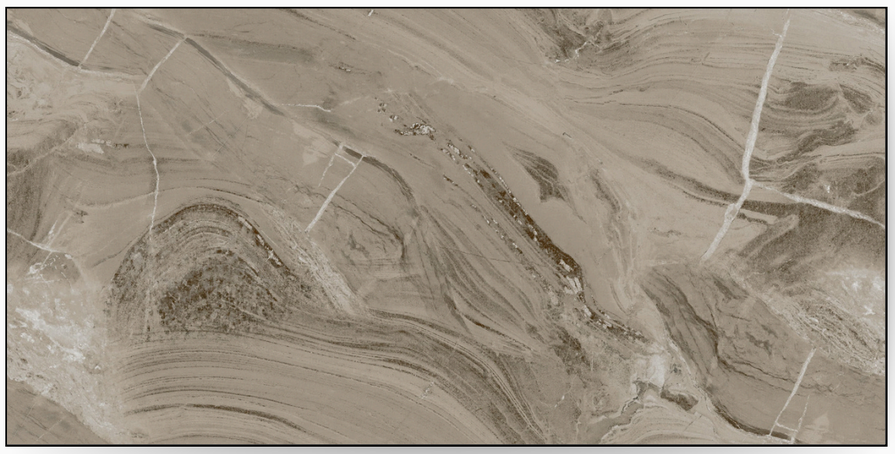

**EL-KARVEL GOLD** R - 4

**EL-MOSCOW CREMA** R - 4

**EL-MOSCOW GREY** R - 4

**EL-POZAS BEIGE** R - 4

**EL-POZAS GREY** R - 4

**EL-UNICORN GREY** R - 4

**EL-THUNDAR BOLT** R - 3

**EL-STATUARIO REDUS** R - 3

**EL-STATUARIO GREY** R - 3

Minimum 3mm Spacer Recommed



**FINISH**
GLOSSY

**SIZE**
60x60cm / 60x120cm

ENDLESS COLLECTION

SASVAT CERAMICA

NEW

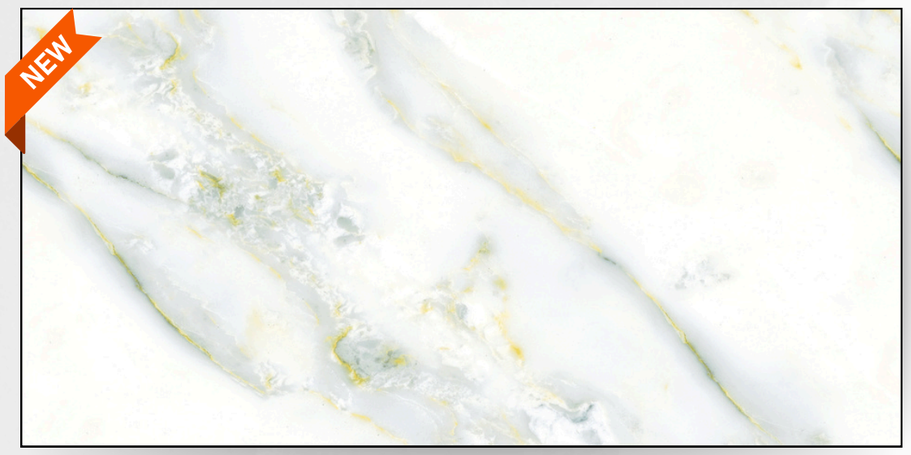

**EL-ALPINO GREEN** **R - 3**

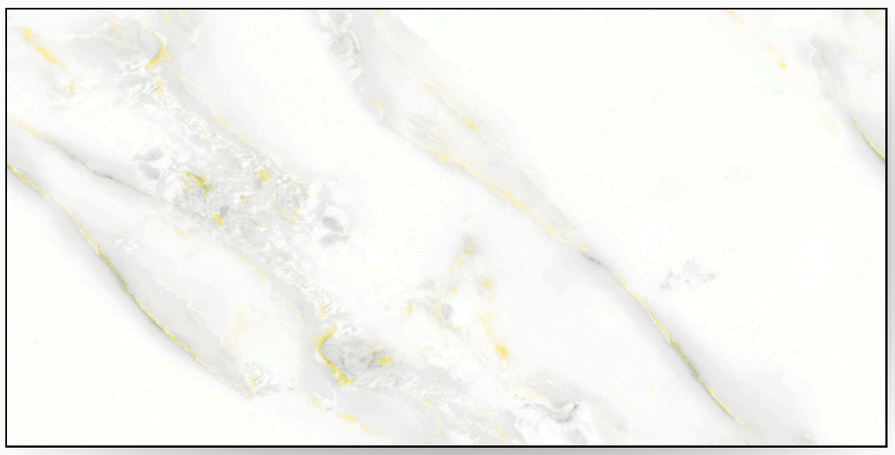

**EX-ALPINO GREY** **R - 3**

**EL-GLACIA BIANCO** **R - 4**

**EL-HISTAN GREY** **R - 4**

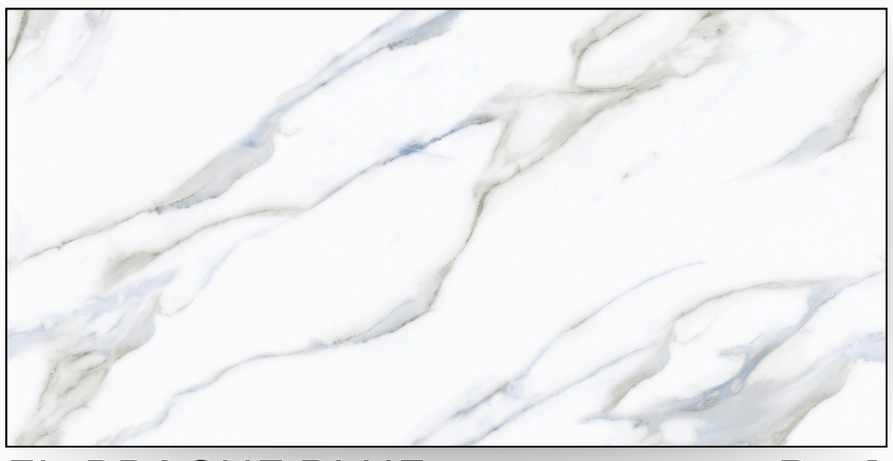

EL-PRAGUE BLUE **R - 4**

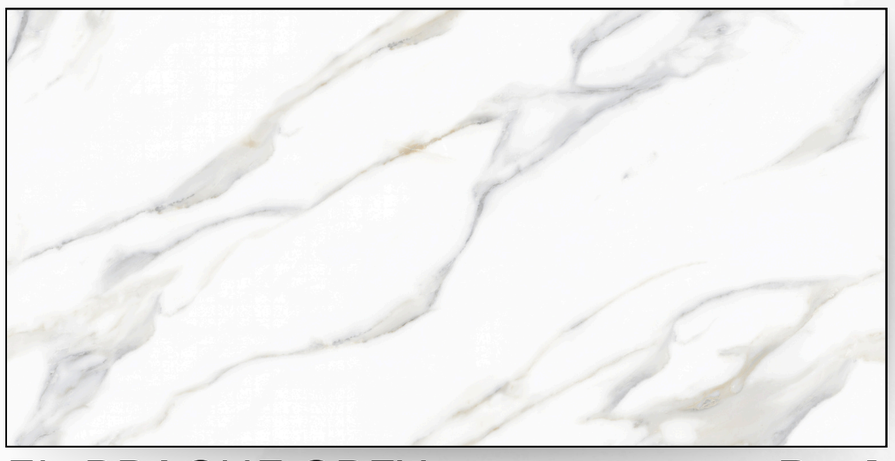

EL-PRAGUE GREY **R - 4**

**EL-BRECCIA BLUE** **R - 4**

**EL-BRECCIA NATURAL** **R - 4**

NEW

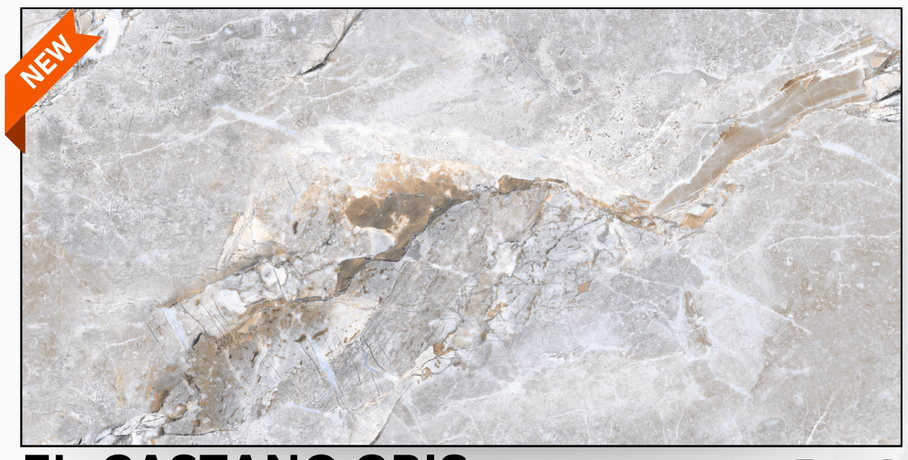

**EL-CASTANO GRIS** **R - 4**

NEW

**EL-BOGOTA CREMA** **R - 3**

**Minimum 3mm Spacer Recommed**

**FINISH**
GLOSSY

**SIZE**
60x60cm / 60x120cm

ENDLESS COLLECTION

SASVAT CERAMICA

**EL-BERLIN BEIGE** **R - 4**

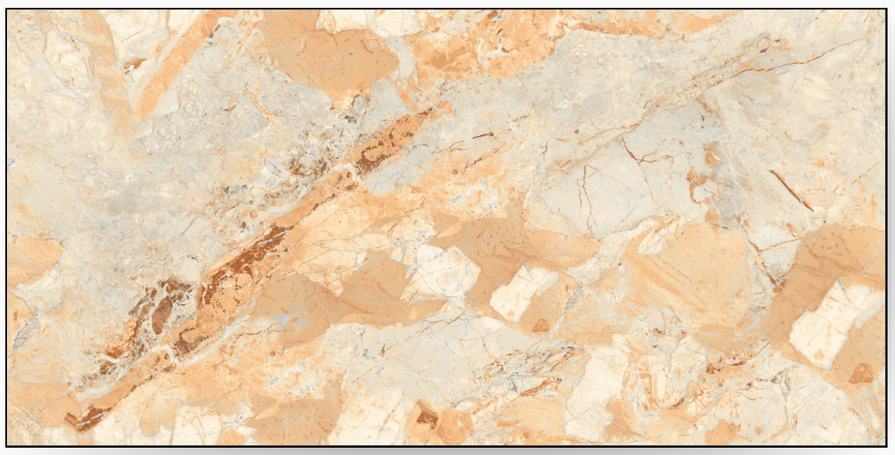

**EL-BRECCIA AMBER** **R - 4**

**EL-IVAR CREMA** **R - 3**

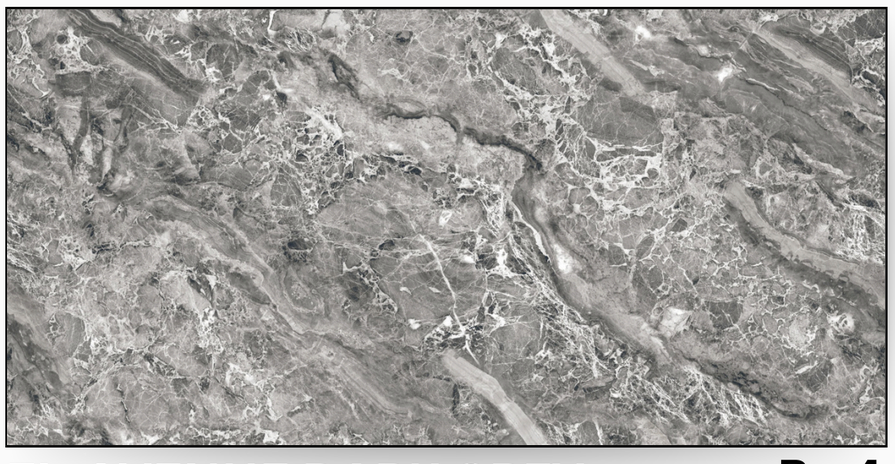

**EL-AVENUE DARK GREY** **R - 4**

**EL-ARABIAN GOLD** **R - 4**

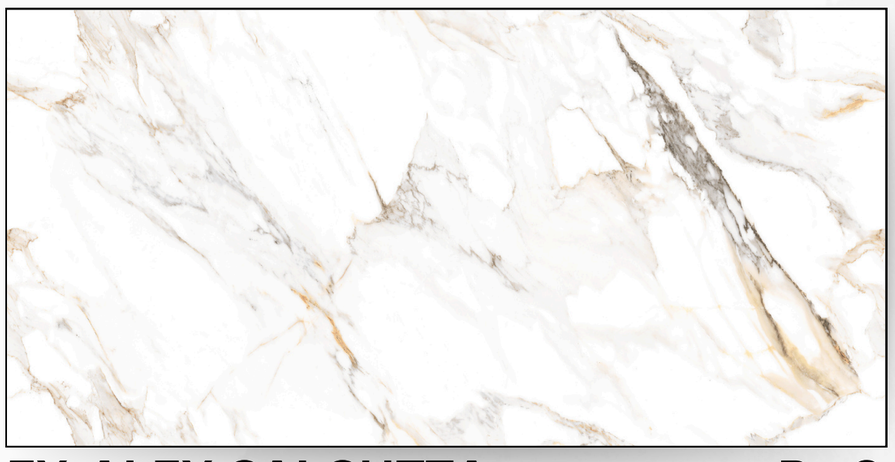

**EX-ALEX CALCUTTA** **R - 3**

**EX-EMPIRE BROWN** **R - 4**

**EL-RIVOLA GREY** **R - 4**

**Minimum 3mm Spacer Recommed**

| Sr No. | CHARACTERISTICS | ISO TEST METHODS | VITRIFIED TILES REQUIREMENT AS PER ISO 13006 BIa / EN176 BIa | VITRIFIED TILES IS 15622 : 2006 GROUP BIa | OUR VALUE |
|---|---|---|---|---|---|
| **A** | **Dimention & Surface Quality** | | | | |
| 1 | Deviation in Length & Width | ISO 10545-2 | +/- 0.6 % | +/- 0.1 % | +/- 0.1 % |
| 2 | Deviation in Thickness | ISO 10545-2 | +/- 5.0 % | +/- 4.0 % | +/- 3.5 % |
| 3 | Straightness of sides | ISO 10545-2 | +/- 0.5 % | +/- 0.1 % | +/- 0.08 % |
| 4 | Rectangularity | ISO 10545-2 | +/- 0.6 % | +/- 0.1 % | +/- 0.1 % |
| 5 | Surface Flatness | ISO 10545-2 | +/- 0.5 % | +/- 0.2 % | +/- 0.2 % |
| 6 | Color Difference | ISO 10545-2 | Unaltered | Unaltered | No Change |
| 7 | Surface Coating | Nano Machine | As per Manufacturer Norms | As per Manufacturer Norms | As per Manufacturer Norms |
| | | | | | |
| **B** | **Phsical Properties** | | | | |
| 1 | Water Absorption | ISO 10545-3 | ≤0.5% | ≤0.08% | 0.5 Below |
| 2 | Flexural Strength (MOR) | ISO 10545-4 | ≥ 35 N mm2 | ≥ 44 N mm2 | 44 |
| 3 | Flexural Breaking Strength | SO 10545-4 | > 1300 N | > 1500 N | 1900 N |
| 4 | Bulk Density (GM/CC) | IDIN 51082 | > 2 gm/cc | > 2.2 gm/cc | 2.35 gm/cc |
| 5 | Glossiness | GLOSSOMETER | As per Manufacturer Norms | As per Manufacturer Norms | Min 95 % |
| 6 | Slip Resistance Coefficient of Friction | ISO 10545-17 | > 0.4 | > 0.4 | > 0.6 |
| **C** | **Chemical Properties** | | | | |
| 1 | Staining Resistance | ISO 10545-14 | Resistant | Resistant | Resistant |
| 2 | Household Chemicals | ISO 10545-13 | No Damage | No Damage | No Damage |
| | | | | | |
| **D** | **Thermal Properties** | | | | |
| 1 | Thermal Shock Resistance | ISO 10545-9 | No Damage | No Damage | Passed |
| 2 | Thermal Expansion | ISO 10545-8 | 9 x 10 - 6 max | 9x10 - 6 - k - 1 max | Passed |
| 3 | Moisture Expansion | ISO 10545-10 | Nil | Nil | Passed |

Home

School

Restaurant

Bank

Hospital

Multiplex

Religion Place

Industry

Airport

Dance Mall

Gymnasium

Super Market

# thank you

SASVAT CERAMICA


For Overseas Inquiry

**SASVAT CERAMICA INDIA**

8-A, National Highway,At Lalpar Dist-Morbi.(Gujarat -India)

Contact No. - +91 70163 63457

Mail - export@sasvatceramica.com